




Cryogenic High Pressure Quickstart Reciprocating Pump Series RP 22 / RP 30 / RP36

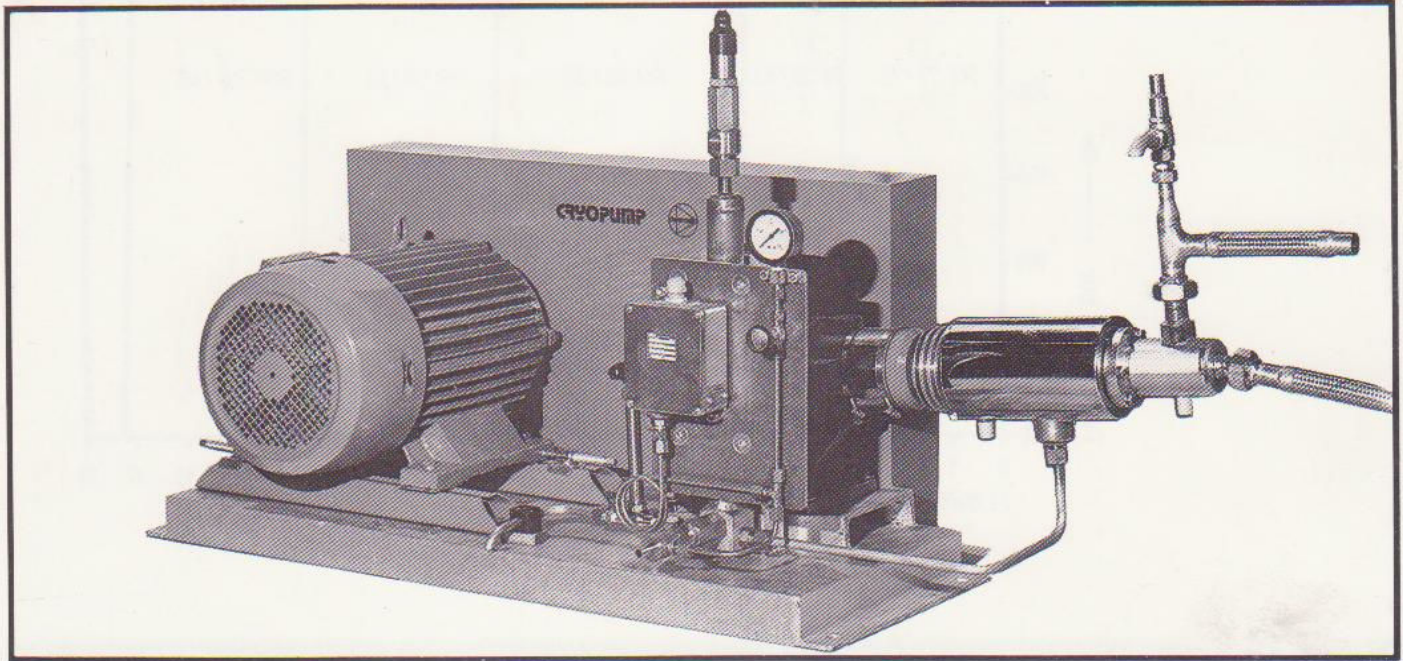

Standard installation for cylinder-filling up to 300 bar pressure

Applications

- Cylinder filling
- Pipeline back-up
- Airplane ground support
- Cold box operation

Fluids pumped

- Oxygen
- Nitrogen
- Argon
- Carbon dioxide


Special Features

- All-round vacuum insulation
- Quick cool down
- High reliability
- Minimal maintenance
- 'DA' double suction system available for extremely low NPSH operation (patent pending)
- For no loss operation, vacuum-insulated flexible hoses available
- Special sealing system for high purity gas and high pressure CO₂ operation

Cryopump designs and manufactures complete turnkey systems for either manual or fully-automatic operation. Detailed offers are available on request.

Series RP22 / RP30 / RP36

Performance

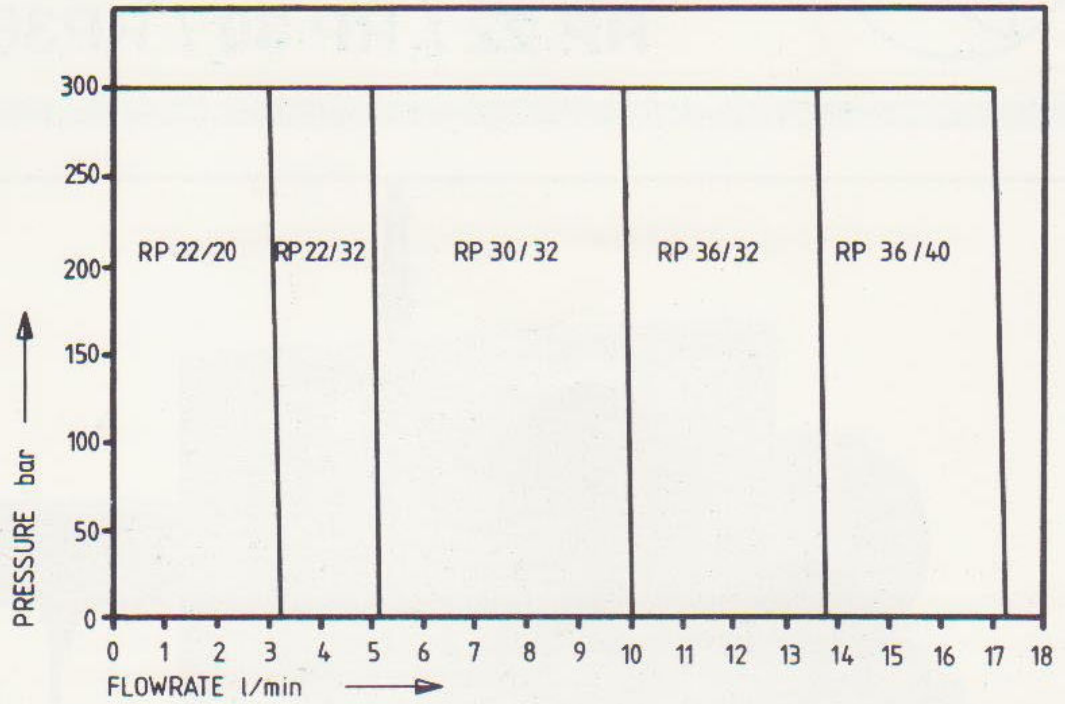

Dimensions

