

B-TIMER

SAFETY AT A GLANCE

New!



for P21 / P31 / P41

Filter cartridge change now safe, simple and economic!

The mini computer counts the operating hours and measures accurately the cartridge saturation. Cartridge exchange due is clearly displayed.

For all mobile BAUER compressors; also for upgrading!

IMPORTANT WHERE IT COUNTS!

- New!** **Filter monitoring** now for **all mobile compressors** with TRIPLEX-P 21, SUPER TRIPLEX-P 31 and P 41 filter systems without electronic compressor control - **also** for **upgrading**.
- New!** **Hour meter** integrated in B-TIMER!
- New!** **Most simple mounting** without piping or wiring - **only screw driver required!**
- New!** **Extremely robust** for global use even under toughest ambient conditions: dust- and splash proof, insensitive to salt, heavy insolation, high humidity and sand.


Most simple maintenance

The **key symbol** indicates that a **maintenance** is due. The **letters** A to C inform about the **necessary** maintenance **kit**.

A = 500 h resp. 1 year; **B** = 1000 h resp. 2 years; **C** = 2000 h resp. 3 years)

Data Safe!

The **battery reading** warns in time if battery change is required. The B-Timer **saves operating hours** and **maintenance intervals** on its RAM in case of battery exchange or longer storage without battery. During standstill of the compressor the B-Timer changes automatically to power save mode. The **long-life lithium cell** (3 V) lasts approx. 3 years (500 h/1/year).

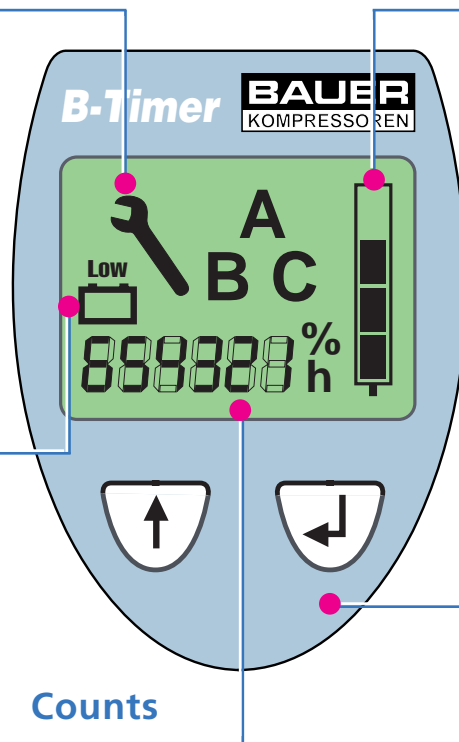

Counts

reliably the operating hours

Via a highly sensitive special sensor the hour meter **starts automatically** at compressor start and **stops** counting **automatically** again if compressor stops.

Saturated?

On the four-part **segment display** the **status** of **saturation** of the cartridge can be followed up. If the remaining capacity is less than 20%, the last segment is flashing and instead of the operating hours the **order number** of the **cartridge** required is indicated. If the cartridge is saturated, all four segments are flashing.

Easy set-up

For the initial operation the compressor data is entered via **two operating keys**. The menu does almost **without language**. Symbols make it **easy** to use.



BAUER KOMPRESSOREN GmbH

P.O. BOX 710260 · D-81452 MÜNCHEN
 DRYGALSKI-ALLEE 37 · D-81477 MÜNCHEN
 PHONE 0049 89 78049-0
 FAX 0049 89 78049-167
 Internet: www.bauer-kompressoren.de
 e-mail: info@bauer-kompressoren.de